




DERO
A PLAYCORE Company

Lock Dock

Submittal Sheet

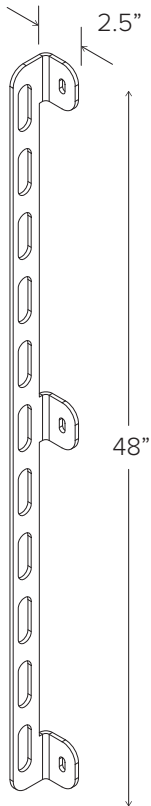

MATERIALS

.25" steel plate

FINISHES

☐

Galvanized

An after fabrication hot dipped galvanized finish is our standard option.

☐

Powder Coat

Our powder coat finish assures a high level of adhesion and durability by following these steps:

1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

☐

Stainless

Stainless Steel: 304 grade stainless steel material finished in either a high polished shine or a satin finish.

MOUNT OPTIONS

☐

Wall mount only

Flange mount has (3) 1/4" flanges - 3 anchors.

It is the responsibility of the installer to ensure that all base materials into which the Lock Dock will be installed can support the Lock Dock with 11 locks and will not be damaged by any required installation procedures.

SETBACKS

