



# FIXIT


## Submittal Sheet

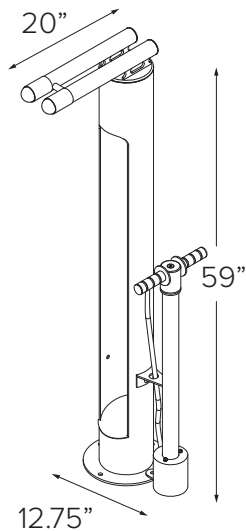

Fixit with Air Kit 2

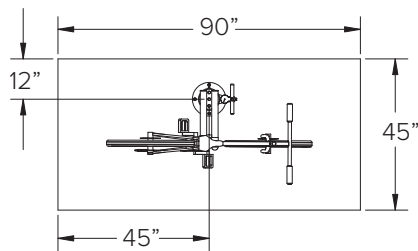

Minimum Footprint



Fixit with Air Kit 3

### CAPACITY

1 Bike

### MATERIALS

Main body: 6"x .154" tube  
 Bike Hanger: 1.5" sch. 40 pipe, 1/4" plate  
 Foot: 10" dia. x .25" plate  
 Tool tethers: 5/32" stainless steel cable  
 Manual air pump

#### Hand tools:

- Philips and flat head screwdrivers
- 2.5, 3, 4, 5, 6, 8mm Allen wrenches
- Headset wrench
- Pedal wrench
- 8, 9, 10, 11mm box wrenches
- Tire levers (2)

### FINISHES

- Galvanized**  
 An after fabrication hot dipped galvanized finish is our standard option.
- Powder Coat**  
 Our powder coat finish assures a high level of adhesion and durability by following these steps:
  1. Sandblast
  2. Epoxy primer electrostatically applied
  3. Final thick TGIC polyester powder coat
- Thermoplastic**  
 In addition to an increased thickness (8-10mils), the thermoplastic finish covers a galvanized layer and offers superior impact resistance over powder coating.
- Stainless**  
 Stainless Steel: 304 grade stainless steel material finished in either a high polished shine or a satin finish.

### MOUNT OPTIONS

- Surface**  
 Has 10" diameter x.25" foot with four anchors per foot.



**DERO**  
 A PLAYCORE Company

www.dero.com | 1-888-337-6729