





**DERO**  
A PLAYCORE Company

**Vizor® Shelter**


## Submittal Sheet

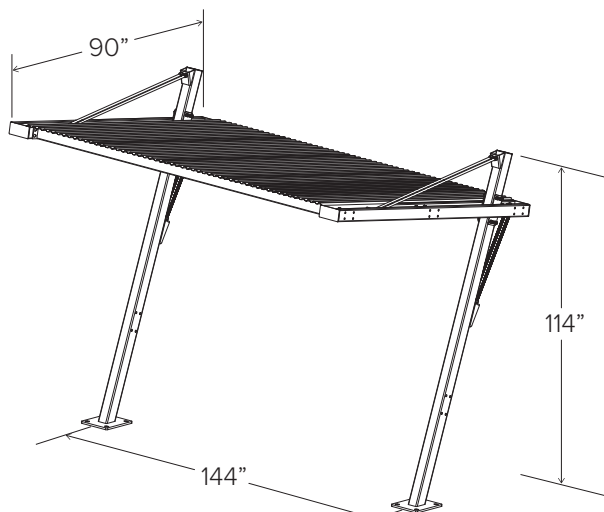


Patent D748,562



With Hoop Racks  
Capacity: 8 Bikes



With Ultra Space Savers  
Capacity: 8 Bikes



With Campus Rack  
Capacity: 6 Bikes

Dero Shelters can be used in a modular fashion (shared uprights) however, when used in this manner, please consult a Dero Bike Rack sales associate for layout, as the rack spacing and bike capacity can change!

### CAPACITY

Varies by rack model

### MATERIALS

**Uprights:** 4" x 5/16" square tube  
**Feet:** 5/8" plate  
**Rafters:** 4" x 2" x 3/16" rectangular tube  
**Purlins:** 4" x 2" x 3/16" rectangular tube  
**Roof Panels:** Type S deck, 26g galvanized steel

### FINISHES



#### Galvanized

An after fabrication hot dipped galvanized finish is our standard option. The Vizor® Shelter roof comes galvanized as the standard option.



#### Powder Coat

Our powder coat finish assures a high level of adhesion and durability by following these steps:

1. Sandblast
2. Epoxy primer electrostatically applied
3. Final thick TGIC polyester powder coat

### MOUNT OPTIONS



#### Surface Only

It is the responsibility of the installer to ensure that all base materials into which the shelter will be installed can support the rack and will not be damaged by any required installation procedures. See structural drawings for details.

### SETBACKS

Consult local building codes for acceptable setbacks and placement.

### LOAD DATA

**Dead Load:** self weight of structure  
**Live Load:** 40 psf  
**Wind Load:** 90 mph exposure B  
**Seismic Load:** moderate  
**Footing:** see page 5  
**Anchors:** .75" diameter x 14.625" Simpson Torq-Cut anchor

### LIGHTING



Solar powered lights are available for an additional charge

